


SV2-T



SV3-T

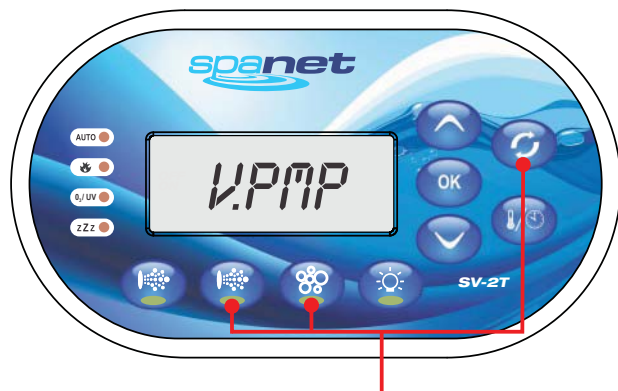

SV4-T



Press & hold: **PUMP B + BLOWER + W.CLN**

1. Power on SV controller
2. Press and hold: Pump B + Blower + W.CLN buttons until [V.PMP] appears on the display
3. Press OK to enter vari pump (V.PMP) menu option and display will now show [OFF]
4. Press UP button until display shows [ON]
5. Press OK to confirm and save new setting

NOTE: Vari-drive pump is now activated if DIP SW2=ON

Press & hold: **BLOWER + W.CLN**

1. Power on SV controller
2. Press and hold: Blower + W.CLN button until [C.LMT] appears on the display
3. Go down through the menu and adjust the following settings:

P.MIN = 031

P.FLT = 032

P.HTR = 035